

IAQ SERIES

INDOOR AIR QUALITY CEILING ACCESS PANELS

Product Dimensions & Specifications



WARRANTY

One year limited parts warranty

MANUFACTURED IN THE USA

PERFORMANCE

- Design provides reduced pressure drop and static resistance over panel, which increases return airflow.
- Beneficial for Title 24 applications and HERS testing where return airflow can be a challenge.

FLEXIBILITY



- One or two inch filters can be used with these panels to increase air filtration efficiency and indoor air quality.

CONSTRUCTION

- Robust galvanized steel construction with smooth powder coat finish.
- Hinged door panel for easy access to air handler and filter(s).
- Equipped with hidden frame feature, where frame screws are not visible after installation.

IAQ PANEL DIMENSIONS

FOR USE WITH				PANEL MODEL	IAQ PANEL DOOR AND FRAME				FILTER QTY	FILTER SIZE
GA(S/T)	GE(S/T)	GB(S/T)	GF(S/T)		A	B	C	D		
18/19/24	18/19/24	-	-	IAQ-1	43-1/2	27-1/2	41-1/2	26	1	20 X 30
20/25/30	20/25	18	18	IAQ-2	49-1/2	27-1/2	47-1/2	26	2	20 X 20
26/31/36	26/30/31/36	19/24	19/24	IAQ-3	55-1/2	27-1/2	53-1/2	26	2	20 X 20
28/32/37	28/32/37	25/30	25/30	IAQ-4	63-1/2	27-1/2	61-1/2	26	2	20 X 25
-	-	31/36	31/36	IAQ-5	70-1/2	27-1/2	68-1/2	26	2	20 X 30

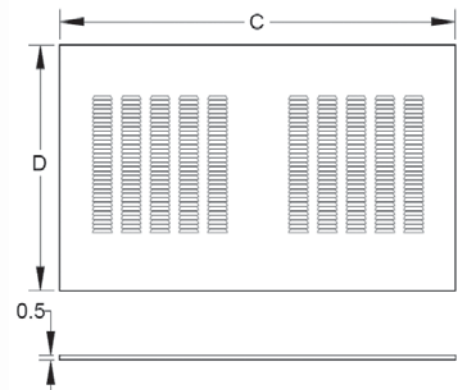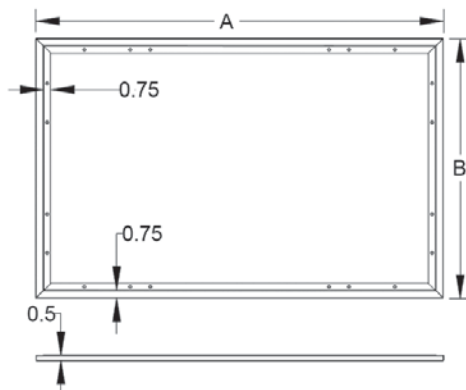

Representative image only.
Some models may vary in appearance.
Due to continuous product improvement,
specifications are subject to change
without notice.



Rev. Date: 08/30/18

© 2018 AirMark



373 Atascocita Rd. Humble, TX 77396
Phone 800.423.9007 Fax 281.441.6510
www.airmark-ac.com