

SG SERIES

SERVICE COILS

Product Dimensions & Specifications

STANDARD SPECIFICATIONS

- Service coils for indoor coil replacement only
- Nominal tonnage designed for 10 - 12 SEER. For higher efficiencies, use C/D Series
- AC and Heat Pump compatible Rified copper tubing, aluminum fins
- Immersion tested at 500 psi, then nitrogen-pressurized and sealed
- Left or right hand refrigerant and plumbing connections
- Liquid line refrigerant connections 3/8", suction line 3/4" on 24-36, 7/8" on 42-60
- Supplied with pistons for both R410A and R22 applications
- Schrader mounted on suction manifold for TXV installation
- Heavy duty plastic drain pans
- 1 year limited warranty

MANUFACTURED IN THE USA

Representative images only.
Some models may vary in appearance.
Due to continuous product improvement, specifications are subject to change without notice.

For complete warranty details visit www.airmark-ac.com.




Rev. Date: 03/10/2023

© 2023 AirMark

SERVICE COILS NOMENCLATURE

SG	C	24	-145	L
AirMark Service Coil	Configuration A - Uncased up/down C - Cased up/down E - Cased multi-position H - Dedicated Horizontal	Size 24-60	Width/height A - Drain pan width C/E - Furnace width H - Cabinet height	Piping L - Left Hand R - Right Hand T - Top

	COIL MODEL	DIMENSIONS			SHIPPING	
		WIDTHS (W)	DEPTH (D)	HEIGHT (H)	WEIGHT	SKID QTY
Uncased 1	SGA23	13,16	19 3/8	11 1/2	17	30
	SGA24	13,16		11 1/2	27	30
	SGA29	13,16		13 1/2	20	25
	SGA30	13,16		13 1/2	31	25
	SGA35	13,16		15 1/2	23	25
	SGA36	13,16		15 1/2	36	25
	SGA41	16,19.5		17 1/2	25	20
	SGA42	16,19.5		17 1/2	40	20
	SGA47	16,19.5		19 1/2	28	16
	SGA48	16,19.5		19 1/2	45	16
	SGA59	19.5		21 1/2	34	12
	SGA60	19.5		21 1/2	54	12
Cased Upflow/Downflow or Multi-Position 2 3	SG(C/E)23	14,14.5,17.5	21 1/2	16	16	20
	SG(C/E)24	14,14.5,17.5		16	29	20
	SG(C/E)29	14,14.5,17.5		18	31	20
	SG(C/E)30	14,14.5,17.5		18	31	20
	SG(C/E)35	14,14.5,17.5		22	39	16
	SG(C/E)36	14,14.5,17.5		20	39	16
	SG(C/E)41	17.5, 21		26	44	12
	SG(C/E)42	17.5, 21		22	39	16
	SG(C/E)47	17.5, 21		26	44	12
	SG(C/E)48	17.5, 21		24	40	12
	SG(C/E)59	21		26	44	12
	SG(C/E)60	21		26	44	12
Dedicated Horizontal 4	SGH23	19.5	31	15	34	16
	SGH24			15	45	16
	SGH35			19	44	16
	SGH36			19	58	16
	SGH47			23	67	12
	SGH48			23	81	12
	SGH59			23	79	12
	SGH60			23	101	12

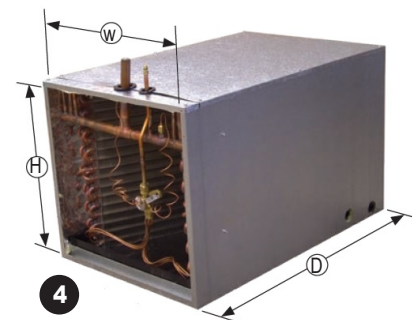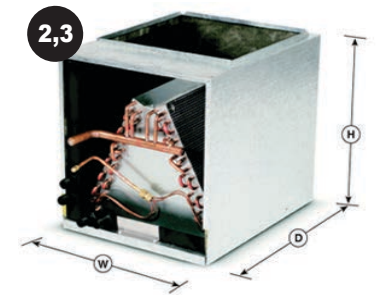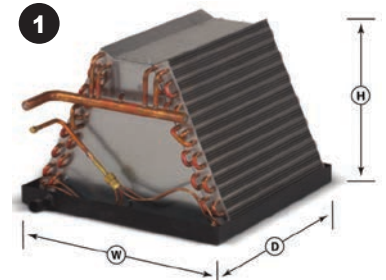

Note: Do not use plastic drain pans on oil furnaces or other applications where outlet temperatures may exceed 290°F. Specify high-temp drain pan via option code for these applications.

