

SG SERIES

SERVICE COILS

Product Dimensions & Specifications

STANDARD SPECIFICATIONS

- Service coils for indoor coil replacement only
- AC and Heat Pump compatible
- Rifled copper tubing, aluminum fins
- Immersion tested at 500 psi, then nitrogen-pressurized and sealed
- Left or right hand refrigerant and plumbing connections
- Liquid line refrigerant connections 3/8", suction line 3/4" on 24-36, 7/8" on 42-60
- Supplied with pistons for both R410A and R22 applications
- Schrader mounted on suction manifold for TXV installation
- Heavy duty plastic drain pans
- 1 year limited warranty

MANUFACTURED IN THE USA

Representative images only.

Some models may vary in appearance.

Due to continuous product improvement, specifications are subject to change without notice.

For complete warranty details visit www.airmark-ac.com.

Rev. Date: 11/10/2021




© 2021 AirMark

SERVICE COILS NOMENCLATURE

SG	C	24	-145	L
AirMark Service Coil	<u>Configuration</u> A - Uncased up/down C - Cased up/down E - Cased multi-position H - Dedicated Horizontal	<u>Size</u> 24-60	<u>Width/height</u> A - Drain pan width C/E - Furnace width H - Cabinet height	<u>Piping</u> L - Left Hand R - Right Hand T - Top

	COIL MODEL	DIMENSIONS			SHIPPING	
		WIDTHS (W)	DEPTH (D)	HEIGHT (H)	WEIGHT	SKID QTY
Uncased 1	SGA24	13-16	19 3/8	11 1/2	15	30
	SGA30	13-16		13 1/2	17	30
	SGA36	13-16		15 1/2	19	25
	SGA42	16-19.5		17 1/2	23	25
	SGA48	16-19.5		19 1/2	25	20
	SGA60	19.5		21 1/2	28	20
Cased Upflow/Downflow 2	SGC24	14-17.5	21 1/2	13	27	20
	SGC30	14-17.5		15	29	20
	SGC36	14-17.5		17	31	16
	SGC42	17.5-21		19	37	16
	SGC48	17.5-21		21	38	12
	SGC60	21		23	42	12
Cased Multi-Position 3	SGE24	14-17.5	21 1/2	16	29	20
	SGE30	14-17.5		18	31	20
	SGE36	14-17.5		20	33	16
	SGE42	17.5-21		22	39	16
	SGE48	17.5-21		24	40	12
	SGE60	21		26	44	12
Dedicated Horizontal 4	SGH24	19.5	31	15	45	16
	SGH36			19	58	16
	SGH48			23	81	12
	SGH60			23	132	12

Note: Do not use heavy duty plastic drain pans on oil furnaces or other applications where outlet temperatures may exceed 290°F

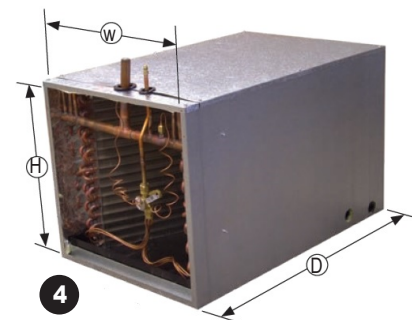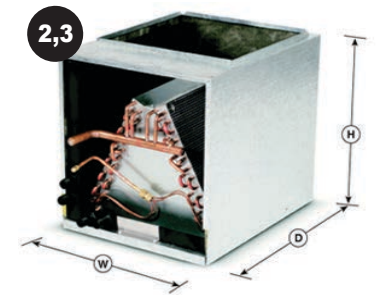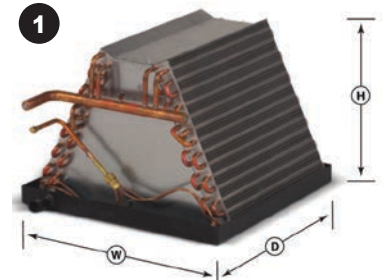

373 Atascocita Rd Humble, TX 77396 Phone
800.423.9007 Fax 281.441.6510 www.airmark-ac.com